



### HA10VSO-DFR (Basınç ve Debi Kontrol) VARIABLE PİSTONLU POMPALAR

Sizes (cm <sup>3</sup> )				16/18cm <sup>3</sup>	28 cm <sup>3</sup>	45 cm <sup>3</sup>	71 cm <sup>3</sup>	100 cm <sup>3</sup>	140 cm <sup>3</sup>
Displacement	Vg max . Cm <sup>3</sup>			18	28	45	71	100	140
Max. Speed	Nmax. rpm			3300	3000	2600	2200	2000	1800
Max. Flow	in Nmax.	qv	L/min	59,4	84	117	156	200	252
	in 1500 r/min.			27	42	68	107	150	210
( P:280 bar)	in Nmax.	Pmax.	Kw	27,7	39	55	73	93	118
Max. Power	in 1500 r/min.			12,6	20	32	50	70	98
( P:280 bar)	in Vg max.	Tmax.	Nm	80,1	125	200	316	445	623
Max. Torque									
Weight		m	Kg	12	15	21	33	45	60





Unit Dimensions Sizes 71

DR: Basınç Kontrol

DFR: Basınç ve Debi Kontrol


DFLR: Basınç,Debi ve Torq.(Güç) Kontrol

Rotary grup HA10VS071... iç grup



Fixing hole thread M10; 17 deep for SAE 1"

Fixing hole thread M10; 17 deep for SAE 1 1/4"

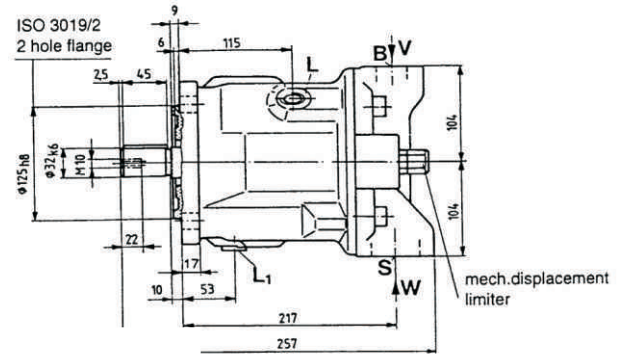

hidrolik