


ZEC NEUTRAL (ŞEFFAF BEYAZ) PNÖMATİK VE YAĞLAMA HORTUMLARI

TEKNİK ÖZELLİKLERİ	ÇALIŞ. BAS.	PATL. BAS.	MIN. BEND. RADIUS	ÇAL. SICAKLIĞI
POLYAMIDE	(Bar)	(Bar)	(mm.)	
PA6 4x2	50	200	30	0°C +70°C
PA6 4x2,5	45	180	45	0°C +70°C
PA6 6x4	50	200	60	0°C +70°C

TEKNİK ÖZELLİKLERİ	ÇALIŞ. BAS.	PATL. BAS.(Bar)	MIN. BEND. RADIUS	ÇAL. SICAKLIĞI
RILSAN	(Bar)	(Bar)	(mm.)	
PA11 4x2	33	133	16	Eksi 40°C +80°C
PA11 4x2,5	23	92	24	Eksi 40°C +80°C
PA11 6x4	33	133	25	Eksi 40°C +80°C
PA11 8x6	33	133	25	Eksi 40°C +80°C
PA11 10x8	33	133	25	Eksi 40°C +80°C

TEKNİK ÖZELLİKLERİ	ÇALIŞ. BAS.	PATL. BAS.(Bar)	MIN. BEND. RADIUS	ÇAL. SICAKLIĞI
POLYAMIDE	(Bar)	(Bar)	(mm.)	
PA12 4x2	70	280	25	Eksi 20°C +80°C
PA12 4x2,5	70	280	36	Eksi 20°C +80°C
PA12 6x4	70	280	25	Eksi 20°C +80°C
PA12 8x6	70	280	36	Eksi 20°C +80°C

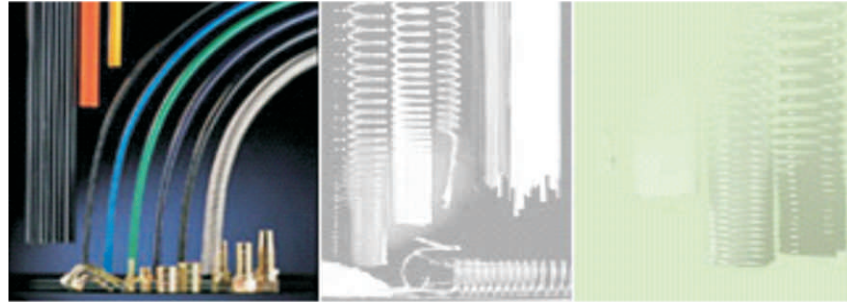

SFT KELEPÇELER

Model	Özelliği	Ölçü
4	onlu	Q4
6	onlu	Q6
8	onlu	Q8
10	onlu	Q10
12	dörtlü	Q12

